


CONCRETE CAP

OVER EXISTING MAIN

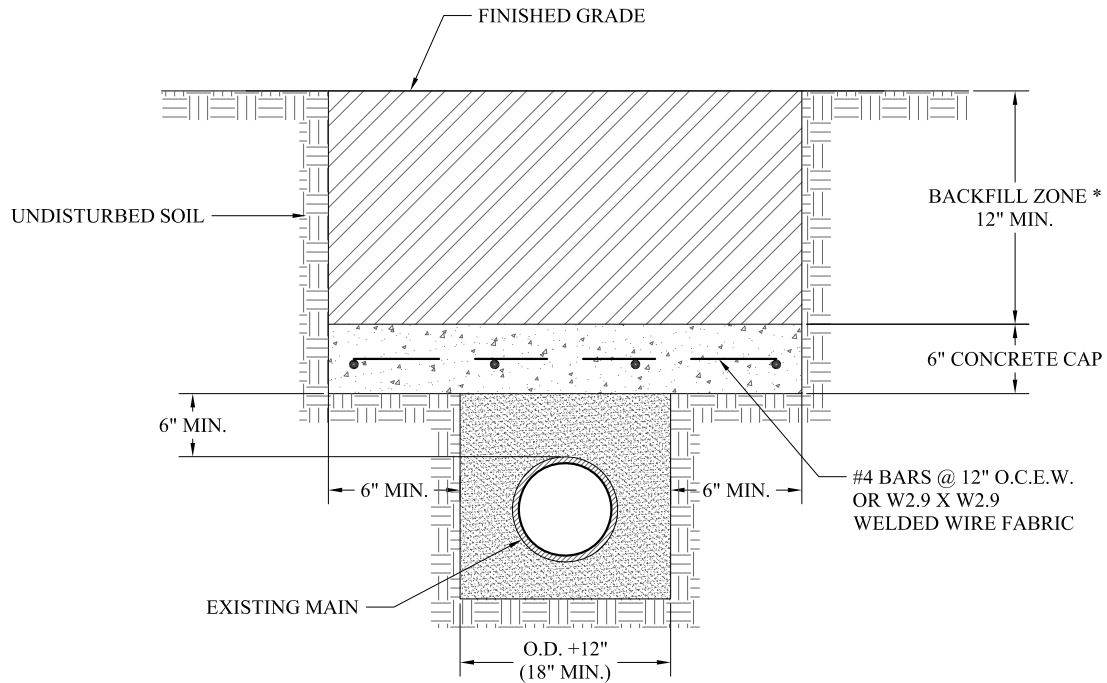

NOTES:

1. CONTRACTOR SHALL POT-HOLE EXISTING MAIN TO BE CAPPED A MINIMUM OF EVERY 50' TO DETERMINE EXACT DEPTH PRIOR TO EXCAVATING FOR PLACEMENT OF CONCRETE CAP. DEPTH VARIATIONS WILL REQUIRE ADDITIONAL POT-HOLING TO ENSURE THE EXISTING MAIN IS NOT DAMAGED.
 2. CONCRETE CAPS SHALL BE PLACED ON FIRM UNDISTURBED SOIL. ANY DISTURBED SOILS SHALL BE RECOMPACTED AT OPTIMUM MOISTURE TO MATCH OR EXCEED SURROUNDING UNDISTURBED SOIL'S DENSITY PRIOR TO PLACING OF CAP.
- * REFER TO UTILITY TRENCH SECTION REPAIR DETAILS FOR BACKFILL AND SURFACE REPAIR REQUIREMENTS.

CITY OF SAN ANGELO

CONCRETE CAP
OVER EXISTING MAIN

JUNE 2016

W-CC