


HOT MIX TO BE ABOVE THE LIP AT THE GUTTER A MIN OF 1/2" AND A MAX OF 1"

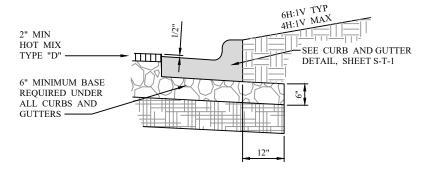

DETAIL "A"

NOTES:

- 1. ALL BASE AND SUBGRADE WILL BE DENSITY CONTROLLED AND WILL MEET ALL SPECIFICATION REQUIREMENTS FOR THE CITY OF SAN ANGELO.
- IT IS THE GOAL OF THE CITY TO DESIGN AND CONSTRUCT A STREET SYSTEM THAT WILL HAVE A LIFE EXPECTANCY OF TWENTY YEARS WITH NORMAL MAINTENANCE. STREETS THAT ARE CONSTRUCTED IN INDUSTRIAL AREAS WHERE HEAVY LOADS ARE EXPECTED WILL REQUIRE INDIVIDUAL DESIGN PROCESSES.
- . 8" ENGINEERED SUBGRADE. IF STABILIZATION IS REQUIRED, THE RATE WILL BE DETERMINED ACCORDING TO TEST RESULTS.

CITY OF SAN ANGELO

URBAN COLLECTOR STREETS

January 2008

S-C-