


EMBEDDING DETAIL
NOT TO SCALE

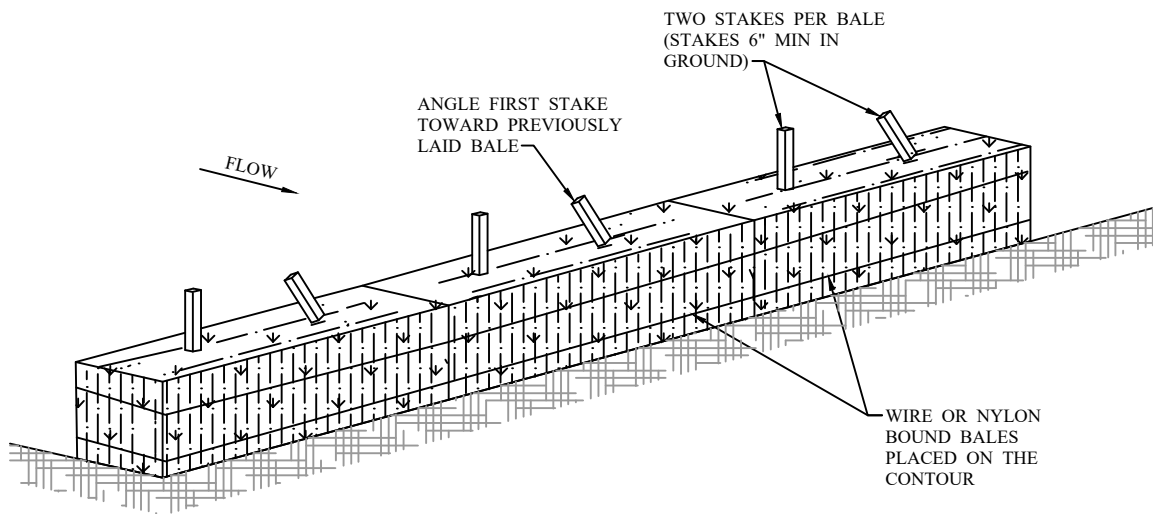

ANCHORING DETAIL
NOT TO SCALE

STRAW BALE DIKE GENERAL NOTES:

1. EACH BALE SHALL BE EMBEDDED IN THE SOIL A MINIMUM OF FOUR INCHES.
2. BALES SHALL BE SECURELY ANCHORED IN PLACE BY 2" x 2" WOOD STAKES DRIVEN THROUGH THE BALES. THE FIRST STAKE IN EACH BALE SHALL BE ANGLED TOWARD THE PREVIOUSLY LAID BALE TO FORCE THE BALES TOGETHER.
3. INSPECTION SHALL BE MADE EVERY TWO WEEKS AND AFTER EACH $\geq 1/2$ " RAINFALL EVENT. REPAIR OR REPLACEMENT SHALL BE MADE PROMPTLY AS NEEDED BY THE CONTRACTOR.
4. WHEN SILT REACHES A DEPTH OF 6 INCHES, IT SHALL BE REMOVED AND DISPOSED OF IN AN APPROVED MANNER.
5. AFTER THE DISTURBED AREAS OF THE SITE ARE COMPLETELY STABILIZED, THE BALES SHALL BE REMOVED AND DISPOSED OF AT AN APPROVED SPOIL DISPOSAL SITE.

CITY OF SAN ANGELO

STRAW BALE DIKE

January 2008

S-CC-2